


Getting the Most Out of Your Device

SOLO / DUAL / INVENT / STEALTH




HYscent Device Installation Tips for Maximum Efficiency

Tips on Installing the DUAL & InVent + DUAL




1 x DUAL

In this **large lobby,** install a Dual unit near the entry door, where the air-flow is left to right. This placement provides a nice clean fragrance upon entry.




3 x DUAL

Since the "air-in" vents are above the stalls in this **restroom**, the air-flow naturally flows from right to left, drawing the fragrance from the installed Duals across the restroom towards the "air-in" vent. Dual units were chosen and placed evenly on two walls. When installing multiple units in a restroom be sure to install all devices at the same height for aesthetic purposes.




4 x DUAL

This represents a **large entrance way.**When fragrancing large areas like this you will need to install Dual units. Be sure to space units evenly on alternating walls the length of the corridor. Be sure to use an adequate number of units; at least one for every 6,000 cubic feet.




4 x DUAL

This is a large stadium restroom with units placed on opposite walls at both ends because there are entrance/exit doors on both sides. Dual units need to be used at one for every 6,000 cubic feet and spaced evenly throughout the restroom. (In high volume, high traffic restrooms, Dual units could be used at one for every 3,000 cubic feet. This accounts for the air flow generated by the constant door opening and foot traffic)...



1 x InVent + 2 x DUALS

This is a large stadium restroom with many stalls and a dividing wall down the center. It is again important to determine air-flow. The use of Dual units, using one for every 6,000 cubic feet, will be most effective on both sides of the room. Additionally, for an application in a room of this size and 10ft ceiling height, the use of the InVent (installed only on the "air-out" vent) will maximize the performance of the fragrance.



2 x InVent + 2 x DUALS

This is another large stadium restroom that has doors on both sides. The vents above are "air-out" vents. Dual units are installed on the right wall to accommodate the air-flow (right to left). This is a perfect situation for use of InVents to maximize performance.



Competitive Choice, Inc. P.O. Box 35743, Houston, TX 77235 www.competitivechoice.net MADE IN USA Phone: 713-838-1144 Fax: 713-838-1188 sales@competitivechoice.net

HYscent Device Installation Tips for Maximum Efficiency

Tips on Installing the STEALTH

DETERMINE PROPER PLACEMENT


The STEALTH is **BEST** positioned:

- ✓ Where guests first enter the space
- ✓ Near an area of high traffic volume
- ✓ Crossing the flow of air from a duct
- ✓ Incoming flow of air from a doorway
- ✓ For permanent installation use the wall mount
- ✓ In crowded spaces use the wall mount to diffuse fragrance for unimpeded fragrance diffusion

The STEALTH should **NOT** be located:


- X Adjacent to exhaust vents
- X In an open window
- X Near an HVAC return grill
- X At face height when sitting/standing

THE SYSTEM SHOULD BE AIMED SO THAT THE SCENT OUTPUT CROSSES THE PATH OF AIRFLOW

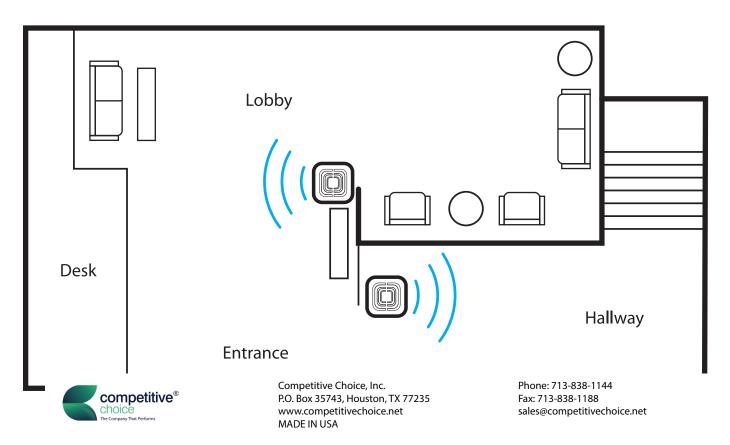


HYscent Device Installation Tips for Maximum Efficiency

Tips on Installing the STEALTH




Hotel Lounge: STEALTH with Wall Mount

Fragrance stream is crossing the walkway airflow.




Trash Compacter Room: STEALTH with Wall Mount

The Stealth is installed in a trash compacter room. Fragrance stream is crossing the entrance airflow.




Convience Store: STEALTH with Wall Mount

Fragrance stream is crossing the store airflow.



Gas Station Shop: STEALTH with Wall Mount

Fragrance stream is crossing the entrance airflow.

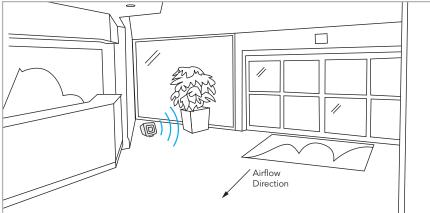

Hotel Lobby: STEALTH with with Kick Stand

Fragrance stream is crossing the entrance airflow.

