



WARDFLEX® Couplings

Ward Manufacturing, LLC.

117 Gulick Street
 Blossburg, PA 16912
 Tel. (800)248-1027
 www.wardmfg.com

Description:

The 3/8" thru 1-1/4" WARDFLEX® tubing is terminated using the patented, STEPSAVER double seal fitting. The 1-1/2" and 2" tubing utilize the WARDFLEX® traditional gasketed fitting design. Only fittings designed and listed for use with the WARDFLEX® and WARDFLEX® MAX CSST Piping Systems shall be used when connecting to the flexible piping.

Features:


- Approved for concealed use
- One corrugation crush seal
- Reusable
- 3/8" through 1-1/4" patented STEPSAVER fittings
 - Primary metal to metal seal
 - Secondary gasket seal
- 1-1/2" and 2" fittings
 - Reliable gasket seal

Components:

- Coupling Body
- Retainer Rings (2)
- Nuts (2)
- Gaskets (2)

Listings:

- CSA: File# 112940_0_000
- IAPMO: File# 3353
- ICC: Report# ESR-1879

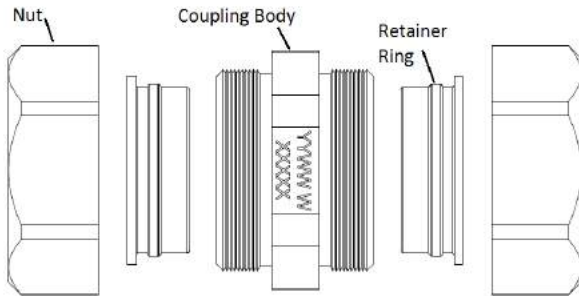

Technical Data:

General

| | |
|------------------------------|--------|
| Certified Operating Pressure | 25 psi |
|------------------------------|--------|

Material

| | |
|----------------------------|-----------------|
| Body, Retainer Ring, & Nut | Brass |
| Gasket | Composite Fiber |

Dimensions

| Price Sheet Item # | CSST Size | Assembled Length | Nut Hex | Coupling Hex | Maximum Tightening Torque (ft-lbs) | Approximate Weight (lbs) |
|--------------------|-----------|------------------|---------|--------------|------------------------------------|--------------------------|
| 260 | 3/8" | 1.568" | 1-1/16" | 1-1/16" | 50 | 0.33 |
| 261 | 1/2" | 1.504" | 1-3/16" | 1-1/16" | 50 | 0.34 |
| 262 | 3/4" | 1.656" | 1-1/2" | 1-1/2" | 120 | 0.57 |
| 263 | 1" | 1.804" | 1-3/4" | 1-3/4" | 160 | 0.83 |
| 264 | 1-1/4" | 2.220" | 2-1/4" | 2-1/4" | 200 | 1.67 |
| 265 | 1-1/2" | 2.964" | 3" | 3" | 200 | 3.99 |
| 266 | 2" | 3.390" | 3-1/2" | 3-1/2" | 200 | 5.47 |