

150# & 300# NON-ASBESTOS FULL FACE & RING GASKETS

Features


- Manufactured from compressed non-asbestos sheet gasket material
- Material is aramid and other synthetic fibers bonded with nitrile rubber (NBR)
- Manufactured through the hot calendar process under rigorous quality control standards that are registered under ISO-9001 certification

Standards

- Meets ASME B16.21 for 150# & 300# gaskets
- Dimensions: ASME B16.5

Service Limits


- Max. Temperature: 750°F (400°C)
- Max. Continuous Temperature: 460°F (240°C)
- Max. Pressure: 1595 PSI (110 Bar)
- Max. Continuous Pressure: 725 (50 Bar)
- Max. Pressure for Saturated Steam: 75 PSI
- ASTM F104 Line Call Out: F712120E22M5

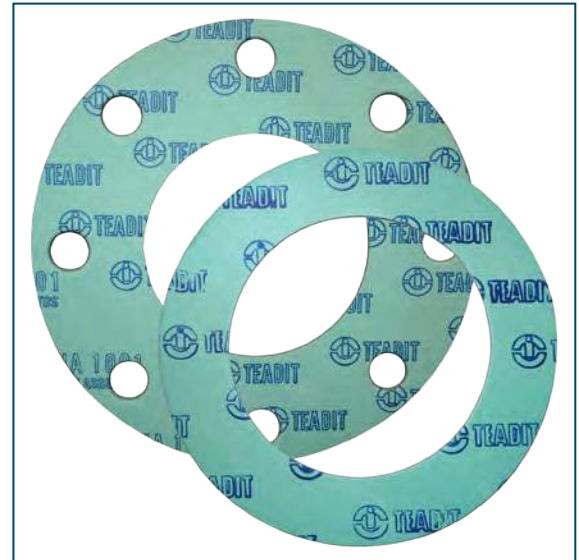

Typical Physical Properties

ASTM Test Method	Property	Value
-	Density	109 lb/ft ³ (1.75 gm/cc)
F36	Compressibility	7-17%
F36	Recovery	min 45%
F38	Tensile Strength Across Grain	1670 psi (11.5 N/mm ²)
F495	Ignition Loss	max 34%
F146	Thickness Increase After 5 Hour Immersion ASTM IRM 903 @ 300°F (150°C) ASTM Fuel B @ 77°F (25°C)	max 12% max 10%
F146	Weight Increase After 5 Hour Immersion ASTM IRM 903 @ 300°F (150°C) ASTM Fuel B @ 77°F (25°C)	max 15% max 15%
F38	Creep Relaxation	25%
F37	Sealability at 1000 PSI	0.25 ml/h

Pressure / Temperature

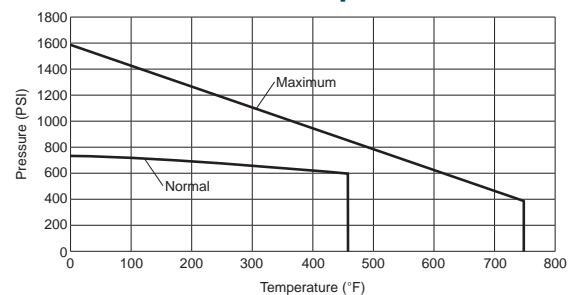

The pressure/temperature chart shown indicates the service limits for the gaskets considering pressure and temperature simultaneously (Tests were performed with nitrogen on 1.6mm [1/16"] thick sheet). The normal curve represents the common usage area for the gaskets while the maximum curve indicates the maximum limits. For applications near or above the maximum curve, contact FNW.

Figure Number Matrix

FNW NA 1 FFG A Size						
PRESSURE	TYPE	THICKNESS	SIZE CODE			
150# = 1	Ring Gasket = RG	1/16" = 116	1/2 = D	2 = K	6 = U	16 = 16
300# = 3	Full Face Gasket = FFG	1/8" = A	3/4 = F	2-1/2 = L	8 = X	18 = 18
			1 = G	3 = M	10 = 10	20 = 20
			1-1/4 = H	4 = P	12 = 12	24 = 24
			1-1/2 = J	5 = S	14 = 14	

DOC: FNWNA06 Ver. 7/2013

© 2013 - FNW. All rights reserved.

The FNW logo is a trademark of Ferguson Enterprises, Inc., PL Sourcing, PO Box 2778, Newport News, VA 23609

www.fnw.com

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice. Always verify that you have the most recent product specifications or other documentation prior to the installation of these products.