



# WELL-X-TROL®

Diaphragm Well Tanks: WX-100, 200 and 300 Series

**150 PSIG Working Pressure**

## Construction

Shell	High Strength Steel
Diaphragm	Heavy Duty Butyl
Liner	Antimicrobial
System Connection	Stainless Steel
Finish	Tuf-Kote™ HG Blue
Water Circulator	Turbulator™
Air Valve	Projection Welded
Factory Precharge	38 PSIG (2.6 bar)

## Performance

Maximum Operating Temperature	200°F (93°C)
Maximum Working Pressure	150 PSIG (10.3 bar)
Maximum Relief Valve Setting	125 PSIG (8.6 bar)
Warranty	7-Years


## Application

- Controls pump cycling in residential well water systems.
- Can be installed indoors or outdoors.

## In-Line Models

Model Number	Tank Volume		Max. Acceptance Factor	A Tank Height		B Tank Diameter		System Connection (NPTM)	Shipping Weight	
	Gal	Lit		In	mm	In	mm		In	Lbs
WX-101	2.0	8	0.45	13	330	8	203	¾	5	2
WX-102	4.4	17	0.55	15	381	11	279	¾	9	4
WX-103	7.6	29	0.43	22	559	11	279	¾	15	7
WX-104	10.3	39	1.00	18	457	15	381	1	20	9
WX-200	14.0	53	0.81	22	559	15	381	1	22	10

Available in gray. Use suffix G.




## Stand Models

Model Number	Tank Volume		Max. Accept. Factor	A Tank Height		B Tank Diameter		C Sys. Conn. Centerline		D Stand Diameter		System Conn. (NPTM)	Shipping Weight	
	Gal	Lit		In	mm	In	mm	In	mm	In	mm		In	Lbs
WX-201	14.0	53	0.81	25	635	15	381	1 <sup>19</sup> / <sub>32</sub>	40	12	304	1	25	11
WX-202	20.0	76	0.57	32	813	15	381	1 <sup>19</sup> / <sub>32</sub>	40	12	304	1	32	15
WX-202XL	26.0	98	0.44	39	991	15	381	1 <sup>19</sup> / <sub>32</sub>	40	12	304	1	39	18
WX-203	32.0	121	0.35	47	1194	15	381	1 <sup>19</sup> / <sub>32</sub>	40	12	304	1	47	21
WX-205	34.0	129	1.00	30	762	22	559	1 <sup>15</sup> / <sub>16</sub>	49	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	57	26
WX-250	44.0	167	0.77	36	914	22	559	1 <sup>15</sup> / <sub>16</sub>	49	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	65	29
WX-251	62.0	235	0.55	47	1194	22	559	1 <sup>15</sup> / <sub>16</sub>	49	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	87	39
WX-255	81.0	306	0.41	57	1448	22	559	1 <sup>15</sup> / <sub>16</sub>	49	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	109	49
WX-252*	86.0	326	0.39	62	1575	22	559	1 <sup>15</sup> / <sub>16</sub>	49	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	107	49
WX-302	86.0	326	0.54	47	1194	26	660	2 <sup>1</sup> / <sub>16</sub>	52	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	106	48
WX-350	119.0	450	0.39	62	1575	26	660	2 <sup>1</sup> / <sub>16</sub>	52	20 <sup>1</sup> / <sub>2</sub>	521	1 <sup>1</sup> / <sub>4</sub>	146	66

\*WX-252: Maximum Working Pressure: 100 PSIG. Available in Blue only. Available in Tan and Gray. Use suffix T or G.

All dimensions and weights are approximate.

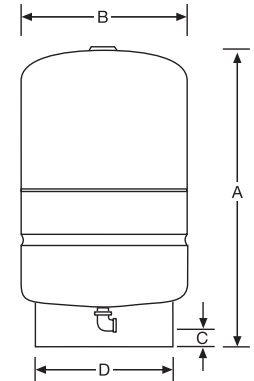

Job Name _____	Notes _____
Engineer _____	_____
Contractor _____	_____
P.O. No. _____	_____
Sales Rep. _____	_____
Model No. _____	_____

