

# Swing Check Valve

### Product Features

- 200 psi WOG
- Material: Brass
- Not for use at or below ground level
- Not for potable use

### Product Numbers



- PF31 Fem IPS Connection  
 PF31S Solder Connection



PF31

### Product Specifications

PART	MATERIAL
BODY	BRASS (CAST)
DISC	BRASS (CAST)
CAP	BRASS (CAST)
PIN	BRASS (ROD)
SCREW	BRASS (FORGED)

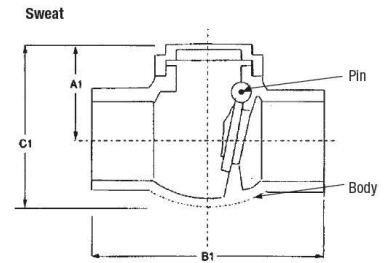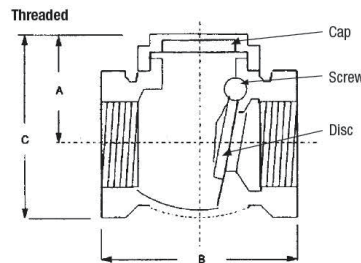

		PF31D 1/2"		PF31F 3/4"		PF31G 1"		PF31H 1-1/4"		PF31J 1-1/2"		PF31K 2"		PF31L 2-1/2"		PF31M 3"		PF31P 4"	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
A	Center of port to top of cap	1.42	36	1.59	39.5	1.77	45	2.07	52.5	2.17	55	2.74	69.5	3.09	78.5	3.80	96.5	4.25	108
A1	Center of port to top of cap	1.40	35.5	1.52	38.5	1.73	44	2.07	52.5	2.13	54	2.68	68						
B	End to end	2.09	53	2.36	60	2.62	66.5	3.19	81	3.54	90	4.21	107	5.14	130.5	5.77	146.5	6.84	173.7
B1	End to end	2.40	61	3.15	80	3.50	89	4.15	105.5	4.57	116	5.47	139						
C	Overall height	2.13	54	2.30	58.5	2.62	66.5	3.07	78	3.43	87	4.21	107	4.98	126.5	6.02	153	7.68	795
C1	Overall height	2.13	54	2.30	58.5	2.62	66.5	3.07	78	3.43	87	4.21	107						
	Weight lbs. Thd.	0.40		0.55		0.76		1.34		1.65		2.58		4.62		6.78		11.13	
	Weight lbs. Swt.	0.38		0.52		0.78		1.38		1.71		2.71							

The swing check valves can be installed on a horizontal pipeline with the body vertical or they may be installed on vertical piping as long as the flow arrow on the body points upward. Good piping practices should be observed during installation.

**WARNING:** This product contains lead or lead compounds known to the State of California to cause cancer and birth defects and other reproductive harm. Do not use in connection with drinking water. Wash hands after handling.

### Warranty and Codes

This PROFLO product carries a 1-year limited warranty

Distributed Exclusively by Ferguson and Wolseley Canada  
 © 2019 Ferguson Enterprises, Inc.



"Not for potable use"