


# Hex Lag Screws

## Grade 1, Zinc

Specification: ASME B18.2.1

Material & Mechanical Properties: Grade 1 per SAE J429

Finish: Fe/Zn 3AN per ASTM F1941/F1941M

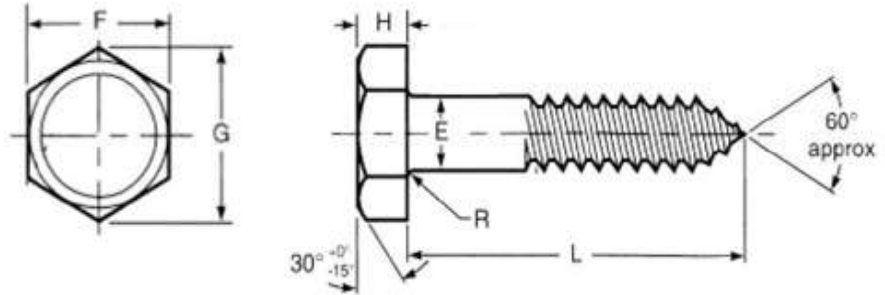

Nomial Size or Basic Bolt Diameter (in)		E		F			G		H			R	
		Body or Shoulder Diameter (in)		Width Across Flats (in)			Width Across Corners (in)		Head Height (in)			Fillet Radius (in)	
		Max	Min	Basic	Max	Min	Max	Min	Basic	Max	Min	Max	Min
1/4	0.250	0.260	0.237	7/16	0.438	0.425	0.505	0.484	11/64	0.188	0.150	0.030	0.010
3/8	0.375	0.388	0.360	9/16	0.562	0.544	0.650	0.620	1/4	0.268	0.226	0.030	0.010
1/2	0.500	0.515	0.482	3/4	0.750	0.725	0.866	0.826	11/32	0.364	0.302	0.030	0.010

SKU	Diameter (in)	Length (in)	Pack Qty
FNWLSZ14112	1/4	1-1/2	12
FNWLSZ142		2	12
FNWLSZ14212		2-1/2	12
FNWLSZ143		3	12
FNWLSZ381	3/8	1	12
FNWLSZ38112		1-1/2	12
FNWLSZ382		2	12
FNWLSZ38212		2-1/2	12
FNWLSZ383	1/2	3	12
FNWLSZ122		2	12
FNWLSZ123		3	12
FNWLSZ124		4	12