




Zurn PEX® XL-Low Lead Brass Barb Tee - QQT__GX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

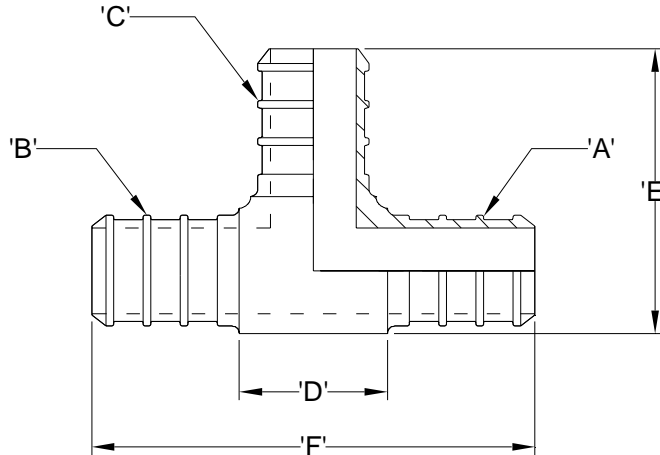

NOTE: Barb geometry will vary depending upon barb size.

Part Number	Description	'A'	'B'	'C'	'D'	'E'	'F'
QQT333GX	1/2" Barb Tee	1/2" Barb	1/2" Barb	1/2" Barb	0.63" [16.0]	1.21" [30.7]	1.88" [47.7]
QQT334GX	1/2" Barb x 1/2" Barb x 3/4" Barb Tee	1/2" Barb	1/2" Barb	3/4" Barb	0.88" [22.4]	1.21" [30.7]	2.13" [54.1]
QQT433GX	3/4" Barb x 1/2" Barb x 1/2" Barb Tee	3/4" Barb	1/2" Barb	1/2" Barb	0.63" [16.0]	1.44" [36.6]	1.88" [47.7]
QQT434GX	3/4" Barb x 1/2" Barb x 3/4" Barb Tee	3/4" Barb	1/2" Barb	3/4" Barb	0.88" [22.4]	1.33" [33.9]	2.13" [54.1]
QQT443GX	3/4" Barb x 3/4" Barb x 1/2" Barb Tee	3/4" Barb	3/4" Barb	1/2" Barb	0.63" [16.0]	1.44" [36.6]	1.88" [47.7]
QQT444GX	3/4" Barb Tee	3/4" Barb	3/4" Barb	3/4" Barb	0.88" [22.4]	1.44" [36.6]	2.13" [54.1]
QQT544GX	1" Barb x 3/4" Barb x 3/4" Barb Tee	1" Barb	3/4" Barb	3/4" Barb	0.88" [22.4]	1.69" [43.0]	2.30" [58.4]
QQT553GX	1" Barb x 1" Barb x 1/2" Barb Tee	1" Barb	1" Barb	1/2" Barb	0.63" [16.0]	1.69" [43.0]	2.22" [56.4]
QQT554GX	1" Barb x 1" Barb x 3/4" Barb Tee	1" Barb	1" Barb	3/4" Barb	0.88" [22.4]	1.69" [43.0]	2.47" [62.7]
QQT555GX	1" Barb Tee	1" Barb	1" Barb	1" Barb	1.13" [28.7]	1.86" [47.2]	2.72" [69.1]
QQT663GX	1-1/4" Barb x 1-1/4" Barb x 1/2" Barb Tee	1-1/4" Barb	1-1/4" Barb	1/2" Barb	0.63" [16.0]	1.94" [49.3]	2.93" [74.4]
QQT664GX	1-1/4" Barb x 1-1/4" Barb x 3/4" Barb Tee	1-1/4" Barb	1-1/4" Barb	3/4" Barb	1.00" [25.4]	1.94" [49.3]	3.30" [83.8]
QQT666GX	1-1/4" Barb Tee	1-1/4" Barb	1-1/4" Barb	1-1/4" Barb	1.50" [38.1]	2.46" [62.5]	3.80" [96.5]
QQT774GX	1-1/2" Barb x 1-1/2" Barb x 3/4" Barb Tee	1-1/2" Barb	1-1/2" Barb	3/4" Barb	0.88" [22.4]	2.15" [54.6]	3.18" [80.8]
QQT775GX	1-1/2" Barb x 1-1/2" Barb x 1" Barb Tee	1-1/2" Barb	1-1/2" Barb	1" Barb	1.13" [28.7]	2.32" [58.9]	3.43" [87.1]
QQT777GX	1-1/2" Barb Tee	1-1/2" Barb	1-1/2" Barb	1-1/2" Barb	1.75" [44.5]	2.68" [68.1]	4.05" [102.9]
QQT885GX	2" Barb x 2" Barb x 1" Barb Tee	2" Barb	2" Barb	1" Barb	1.13" [28.7]	2.74" [69.6]	4.13" [104.9]
QQT888GX	2" Barb Tee	2" Barb	2" Barb	2" Barb	2.20" [55.9]	3.44" [87.4]	5.20" [132.1]

Engineering Specification: Zurn PEX® XL-Low Lead Brass Barb Tee. The QQT__GX is used to branch off the main line or change direction. Manufactured from EcoBrass®, C69300. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61 including Annex G, ASTM F877, CSA B137.5, and ASTM F1807.

Accessories

- ___ QCLP3X 1/2" QuickClamp® Crimp Ring
- ___ QCLP4X 3/4" QuickClamp® Crimp Ring
- ___ QCLP5X 1" QuickClamp® Crimp Ring
- ___ QCR3X 1/2" Copper Crimp Ring
- ___ QCR4X 3/4" Copper Crimp Ring
- ___ QCR5X 1" Copper Crimp Ring
- ___ QCR6X 1-1/4" Copper Crimp Ring
- ___ QCR7X 1-1/2" Copper Crimp Ring
- ___ QCR8X 2" Copper Crimp Ring
- ___ QSOET3X 1/2" Stainless Steel Crimp Ring
- ___ QSOET4X 3/4" Stainless Steel Crimp Ring
- ___ QSOET5X 1" Stainless Steel Crimp Ring

Rev. _____ Date: 2/22/10 C.N. No. 110729
Dwg. No. 84483 Prod. No. QQT__GX